

URTC-1200/3000/4000e

Universal Resistive Touch Controller

General Specifications

Electrical

Supply Voltage	DC5V (+4.75 ~ +5.25 VDC)
Power Consumption	40mA (Typical)
Resolution	4096 x 4096
ESD	Contact Discharge 8KV, Air Discharge 15KV

Interface

USB, RS232

Environmental

Operating Temperature	0°C ~ +65°C
Storage Temperature	-25°C ~ +85°C
Operation/Storage Humidity	10% ~ 90% RH

Mechanical Dimensions

URTC-1200/	77mm x 23mm x 8mm
URTC-3000/	64mm x 33mm x 8mm
URTC-4000e/	84mm x 53mm x 8mm

Operating Mode


Desktop, Drawing, Button

MTBF

Greater than 300,000 hours

Operating System

Windows 98/2000/ME/XP/NT/CE/Vista, DOS, Linux
(URTC-3000 supports Windows Vista on both USB and RS232 interfaces)

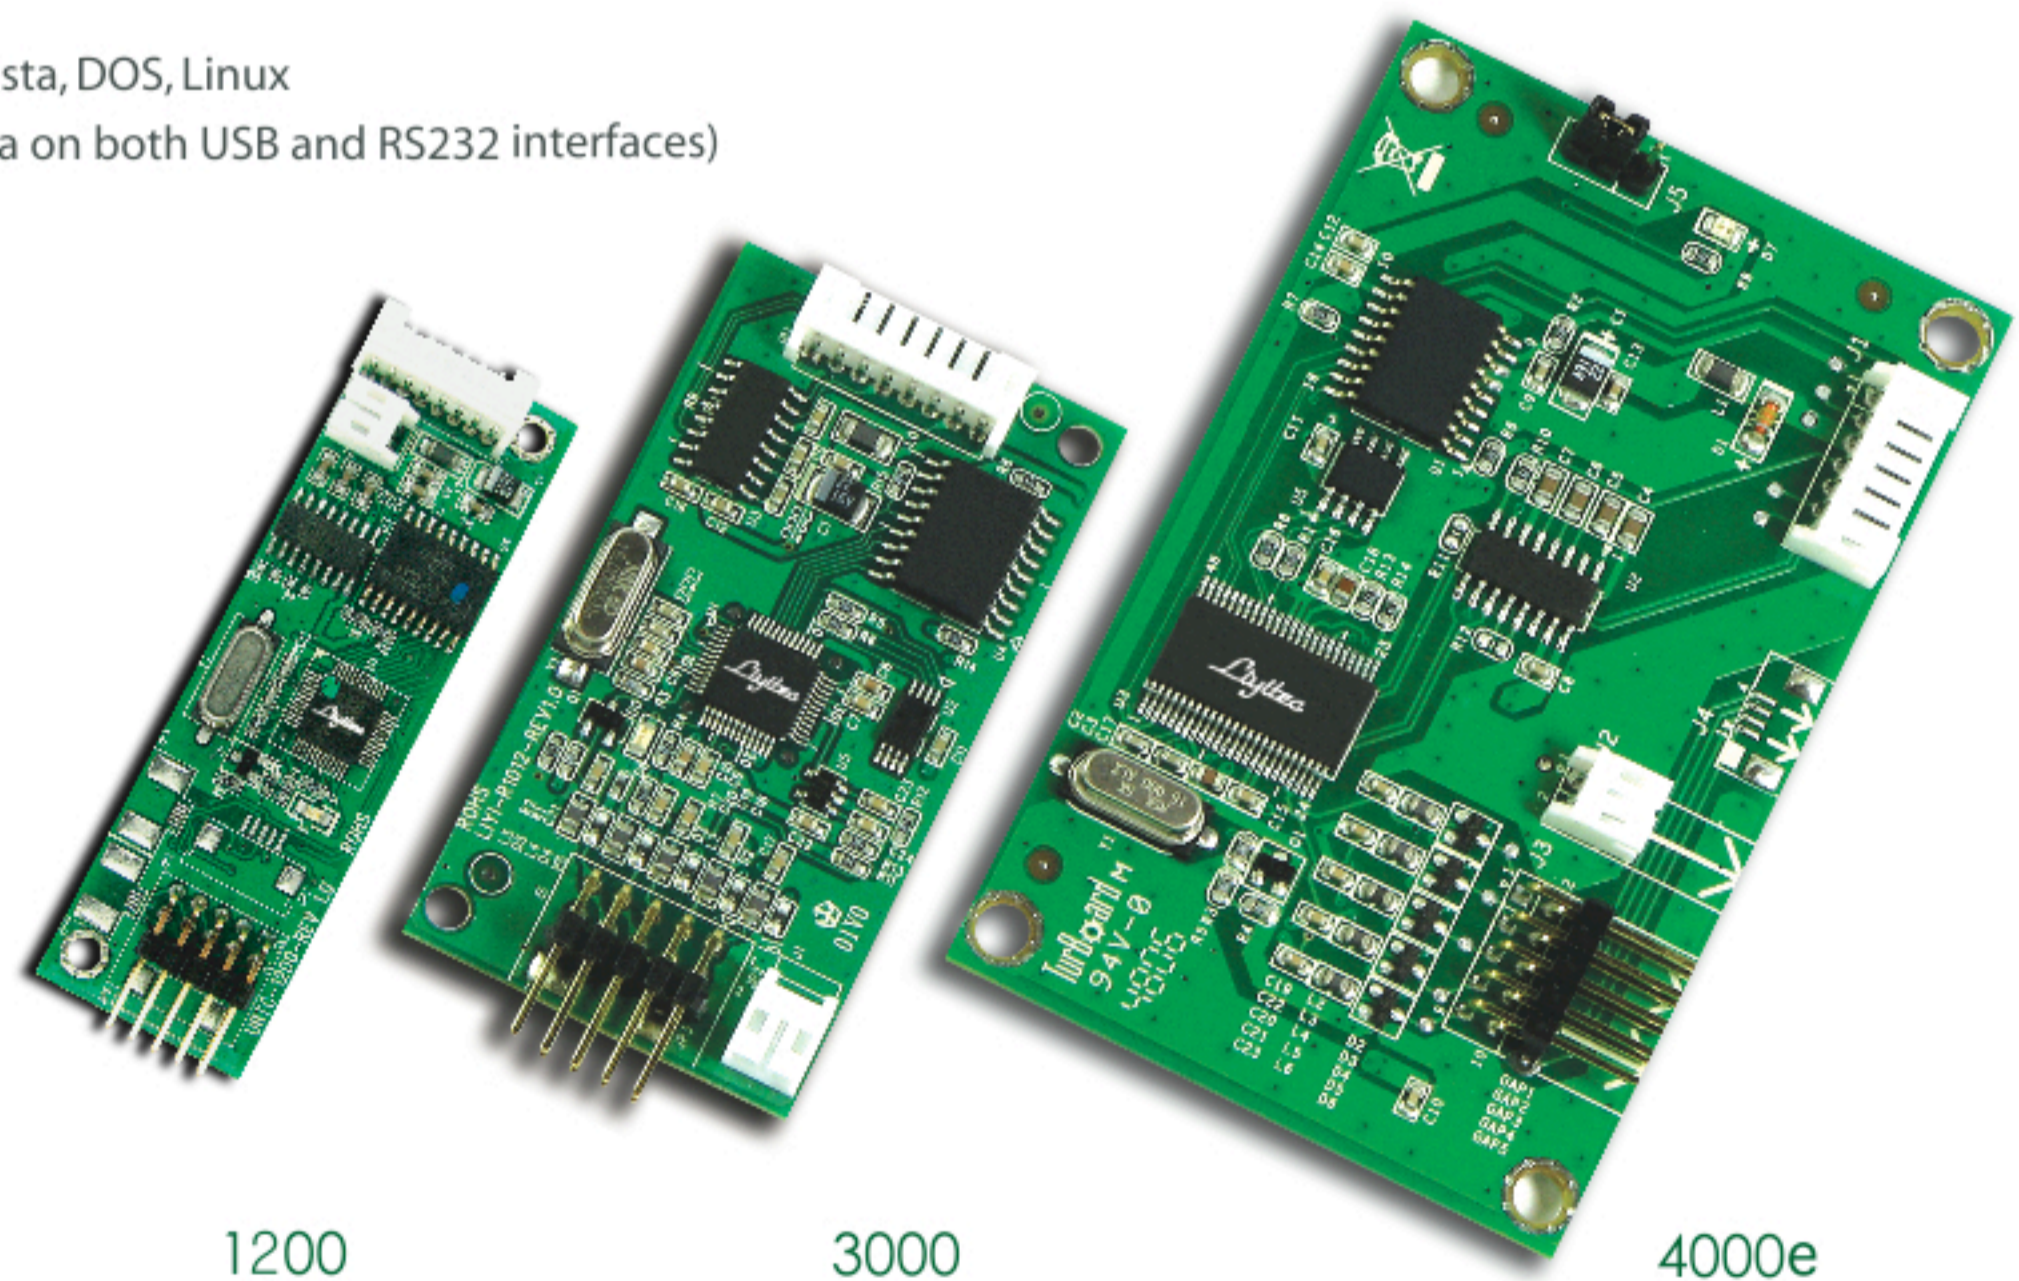

QC-080000
Certified

ISO-9001
Certified

ISO-14001
Certified

SGS
Certified

RoHS
COMPLIANT

CE FC



insist on Quality

LIYTEC INC.

9 Singye St., Gueishan Township, Taoyuan County 333, Taiwan
PHONE: +886-3-3591055 FAX: +886-3-3592055